LXF_2-300×1000

铝门窗双头仿形铣床 Double-head Copy-routing Milling Machine

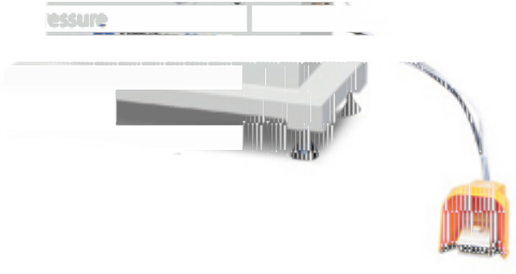

[性能特点] [Product Features]

- 该铣床用于铝门窗的各类型托铰的仿形铣削加工。
- 采用仿形板和辅助定位构件仿形方式。
- 使用脚踏开关控制压紧气缸，安全可靠。

- It has features of compact structure and small volume, the air pressure drive the clamping.
- Simple model adjustment and replacement, wide adaptation, high efficiency.

技术参数 Technical Parameters

电 源	Power supply	380v 50Hz
耗气量	Air consumption	30l /min
输入功率	Input power	2×0.75kW
铣刀直径	Diameter of the milling cutter	φ5、φ8
仿型触头直径	Diameter of copy-routing head	φ5、φ8
仿形范围	Copy-routing Range	
加工面的直线度	Processing deviation from straightness	±0.1 mm
铣削型面粗糙度	Milling surface roughness	Ra12.5 μm
机床外形尺寸	Contour dimension	4050×950×1500mm(L×W×H)
重 量	Weight	250kg